

MV-CH650-90XM/XC

65MPCMoSCoaXPressAreaScanCamera



GEN*i*CAM

Introduction


MV-CH650-90XM/XC camera adopts Gpixel GMAX3265 sensor and CXP-6 interface to provide high-quality and non-compressed images in real time. Its max. frame rate reaches up to 31.5 fps in full resolution.

Key Feature

- Resolution of 9344×7000 , and pixel size of $3.2 \mu\text{m} \times 3.2 \mu\text{m}$.
- Adopts global shutter CMOS to provide high dynamic range, SNR, and high-quality image.
- Adopts CXP-6 interface to transmit data.
- Compatible with CoaXPress Protocol and GenICam Standard.

Dimension

F-mount with fan:

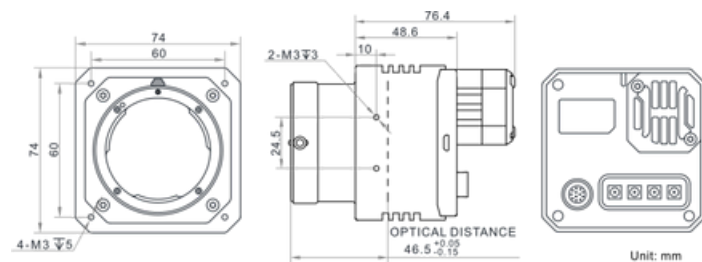


Available Model

- M58-mount with fan, mono: MV-CH650-90XM-M58S-NF
- F-mount with fan, mono: MV-CH650-90XM-F-NF
- M58-mount with fan, color: MV-CH650-90XC-M58S-NF
- F-mount with fan, color: MV-CH650-90XC-F-NF


Applicable Industry

PCBAOI, FPD, high-accuracy measurement, etc.

Sensor Quantum Efficiency

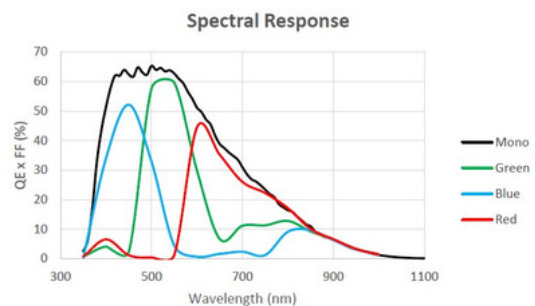

M58-mount with fan:

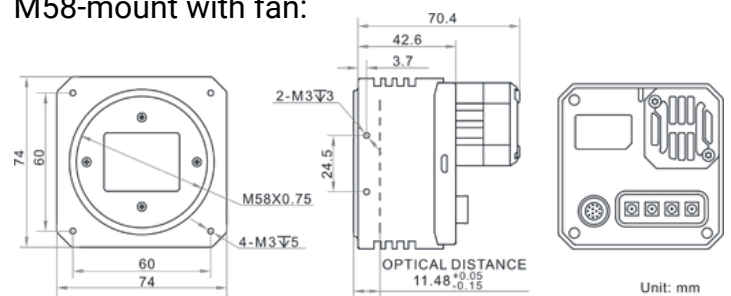

Specification

HIKROBOT

Model	Camera	MV-CH650-90XM	MV-CH650-90XC
Sensor	type		
Sensor	model	CMOS, global shutter	
Pixel size	Sensor	Gpixel GMAX3265	
size	Resolution	3.2 μm × 3.2 μm	
Max. frame rate		29.9 mm × 22.4 mm	
Dynamic range		9344 × 7000	
SNR	Gain	31.5 fps @ 9216 × 7000	31.5 fps @ 9344 × 7000
Exposure time		66 dB	
Exposure mode		40 dB	
Mono/color	Pixel	1.25x to 6x	
format	Binning	14 μs to 10 sec	
Decimation		Off/Once/Continuous exposure mode	
Reverse image		Mono	Color
Electrical features		Mono 8/10/12	Bayer BG 8/10/12
Data interface		Supports 1 × 1, 1 × 2, 1 × 4, 2 × 1, 2 × 2, 2 × 4, 4 × 1, 4 × 2, 4 × 4	
Digital I/O		Supports 1 × 1, 1 × 2, 1 × 4, 2 × 1, 2 × 2, 2 × 4, 4 × 1, 4 × 2, 4 × 4	
		Supports horizontal and vertical reverse image output	
		CoaXPress with DIN interface	
		12-pin P10 connector provides I/O: opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2), and RS-232 × 1.	
Power supply		9 VDC to 24 VDC	
Power consumption		Typ. 10.5 W @ 24 VDC	Typ. 10.2 W @ 24 VDC
Mechanical			
Lens mount		M58*0.75, flange back length 11.48 mm F-mount, flange back length 46.5 mm	
Dimension		M58-mount with fan: 74 mm × 74 mm × 70.4 mm (2.9" × 2.9" × 2.8") F-mount with fan: 74 mm × 74 mm × 76.4 mm (2.9" × 2.9" × 3.0")	
Weight		M58-mount with fan: approx. 470 g (1.0 lb.) F-mount with fan: approx. 500 g (1.1 lb.)	
Ingress protection		IP40 (under proper lens installation and wiring)	
Temperature		Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: −30 °C to 70 °C (−22 °F to 158 °F)	
Humidity		20% RH to 95% RH (no condensation)	
General			
Client software		Frame grabber software meeting with CoaXPress Protocol	
Operating system		32/64-bit Windows 7/10, 64-bit Windows 11 with 8 GB memory or above	
Compatibility		CoaXPress, GenICam	
Certifications		CE, RoHS, KC	