

MV-CS050-60GM/GC/GN

5 MP 2/3" CMOS GigE Area Scan Camera



GEN*i*CAM

GigE
VISION

Introduction


With GigEinterface, MV-CS050-60GM/GC/GN camera adopts CMOS global sensor to provide high-quality images and transmit images in real time, and its max. frame rate can reach 23 fps in full resolution.

Key Feature

- Adopts brand new design to reduce power consumption. Supports auto or manual adjustment of gain, exposure time, white balance, LUT, Gamma correction, etc., and supports Sequencer function.
- Supports ISP functions like CCM, Super Palette, and Super Bayer to provide high-quality images.
- Compact design with mounting holes on panels for flexible mounting from 4 sides. Adopts GigE interface and max. transmission distance of 100 meters without relay. Compatible with GigE Vision V2.0 Protocol,
- GenICam Standard, and third-party software

based on the protocol and standard.

Dimension

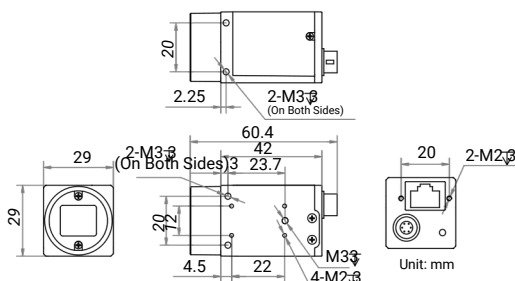


Available Model

- Mono camera: MV-CS050-60GM
- Color camera: MV-CS050-60GC
- NIR camera: MV-CS050-60GN


Applicable Industry

Electronic semiconductor, factory automation, food and beverage, medicine packaging, etc.

Sensor Quantum Efficiency

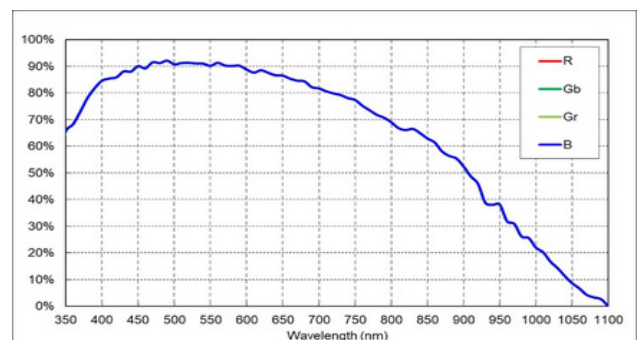

MV-CS050-60GM/GN

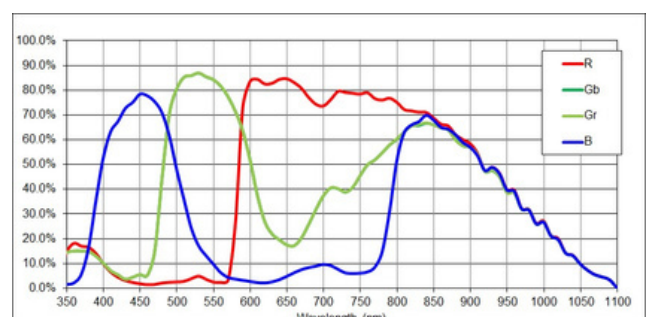

MV-CS050-60GC

Specification

HIKROBOT

Model	MV-CS050-60GM	MV-CS050-60GC	MV-CS050-60GN
Performance			
Sensor type	CMOS, global shutter		
Sensor model	Stacked BSI		
Pixel size	3.45 μm × 3.45 μm		
Sensor size	2/3"		
Resolution	2448 × 2048		
Max. frame rate	23 fps @ 2448 × 2048 Mono 23 fps @ 2448 × 2048 Bayer 23 fps @ 2448 × 2048 Mono		
Dynamic range			
SNR	8	GR 8	8
Gain	73.9 dB		
Exposure time	42.4 dB		
Exposure mode	0 dB to 24 dB		
Mono/color	High full well capacity: 30 μs to 10 sec High sensitivity: 5 μs to 10 sec		
	Off/Once/Continuous exposure mode		
	Mono	Color	Near IR
Pixel format	Mono 8/10/10Packed /12/12Packed	Mono 8/10/12, Bayer GR 8/10/10Packed/12/12Packed, YUV422_Packed, YUV422_YUYV_Packed, RGB 8, BGR 8	Mono 8/10/10Packed /12/12Packed
Binning	Supports 1 × 1, 2 × 2, 4 × 4		
Decimation	Supports 1 × 1, 2 × 2, 4 × 4		
Reverse image	Supports horizontal and vertical reverse image output		
Electrical features			
Data interface	Gigabit Ethernet (1000 Mbit/s), compatible with Fast Ethernet (100 Mbit/s)		
Digital I/O	6-pin P7 connector provides power and I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2).		
Power supply	9 VDC to 24 VDC, supports PoE		
Power consumption	Typ. 2.3 W @ 12 VDC	Typ. 2.5 W @ 12 VDC	Typ. 2.3 W @ 12 VDC
Mechanical			
Lens mount	C-mount		
Dimension	29 mm × 29 mm × 42 mm (1.1" × 1.1" × 1.7")		
Weight	Approx. 100 g (0.2 lb.)		
Ingress protection	IP40 (under proper lens installation and wiring)		
Temperature	Working temperature: −30 °C to 60 °C (−22 °F to 140 °F)		
Humidity	Storage temperature: −30 °C to 80 °C (−22 °F to 176 °F)		
General	20% RH to 95% RH (no condensation)		
Client software			
Operating system	MVS or third-party software meeting with GigE Vision Protocol		
Compatibility	32/64-bit Windows 7/10, 64-bit Windows 11, 32/64-bit Linux		
Certification	GigE Vision V2.0, GenICam		
	CE, RoHS, KC		