






OPT CC1 Series Area Scan Cameras


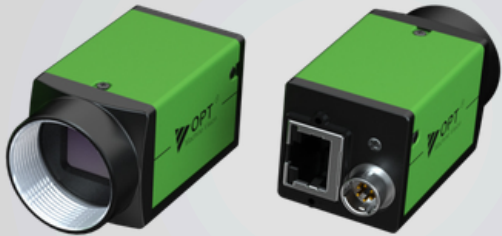



OPT-CC1-C013-GG0-00

- Gigabit Ethernet interface, the maximum transmission distance of 100m without relay.
- Support ISP functions including Gamma, LUT, Black level, Brightness and Contrast etc.
- Support Hardware Trigger, Software Trigger, Free Run Mode.
- Built-in large-capacity frame cache, used for data transmission or image retransmission in burst mode.
- Support multiple image data formats output, ROI, Reverse and Auto Function etc.
- Compatible with GigE Vision V2.0 Protocol and GenICam Standard, convenient for third-party connection.

Specification								
Model	Sensor model	Sensor type	Shutter type	Resolution	Frame rate	Pixel size	Sensor size	Mono/Color
OPT-CC1-C013-GG0-00	PYTHON 1300	CMOS	Global	1264 × 1020	91.3 fps	4.8 μm × 4.8 μm	1/2"	Color

Name	1.3 MP Color GigE Area Scan Camera
Pixel format	Mono 8/10/12, BayerRG 8/10/10Packed/12/12Packed, YUV422Packed, YUV422_YUYV_Packed, RGB 8, BGR 8
Max Frame rate	91.3 fps@1264 × 1020 BayerRG 8
Dynamic range	59.6 dB
SNR	39.8 dB
Gain	0 dB ~ 15 dB
Exposure time	1 μs ~ 5 s
Trigger mode	Software Trigger/Hardware Trigger/Free Run Mode
Reverse image	Horizontal Reverse, Vertical Reverse
Binning	No Support
Data interface	Gigabit Ethernet (1000Mbit/s)
I/O interface	6-pin Hirose connector provides power and I/O: 1 × Opto-isolated input (Line 1), 1 × Opto-isolated output (Line 2), 1 × bi-directional non-isolated I/O (Line 3)
Power supply	12 VDC to 24 VDC, supports PoE
Power consumption	2.98 W@12 VDC
Lens mount	C-Mount
Dimension	29 mm× 29 mm× 42 mm
Weight	≈ 90 g
Temperature	Working temperature: 0 °C to 50 °C, Storage temperature: 0 °C to 80 °C
Operating system	Windows 7/10/11 32/64bits, Linux 64bits, MacOS 64bits
Compatibility	GigE Vision V2.0, GenICam
Certification	CE, RoHS, FCC, UL

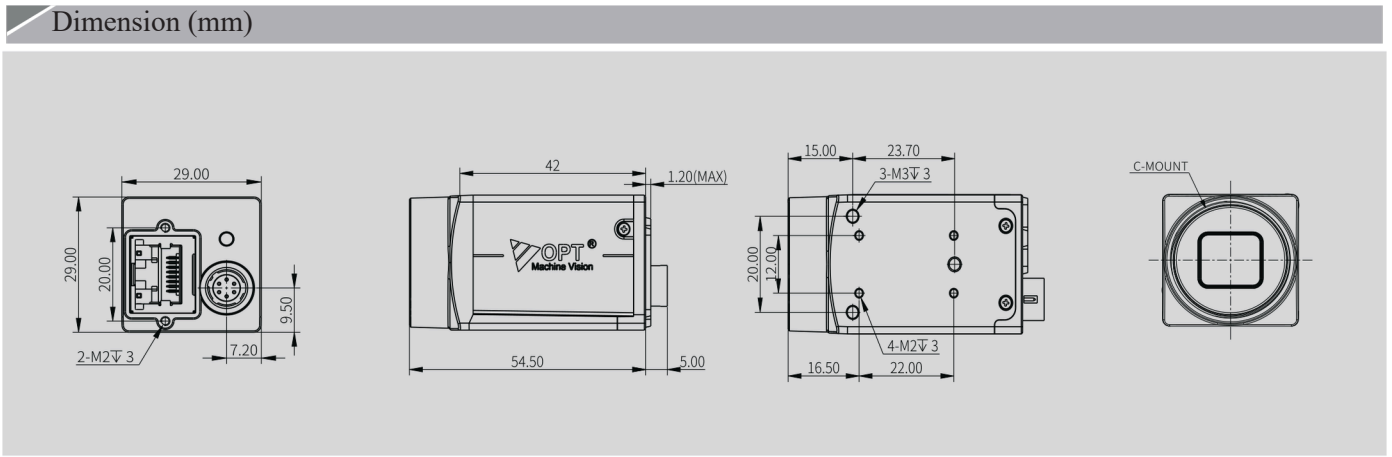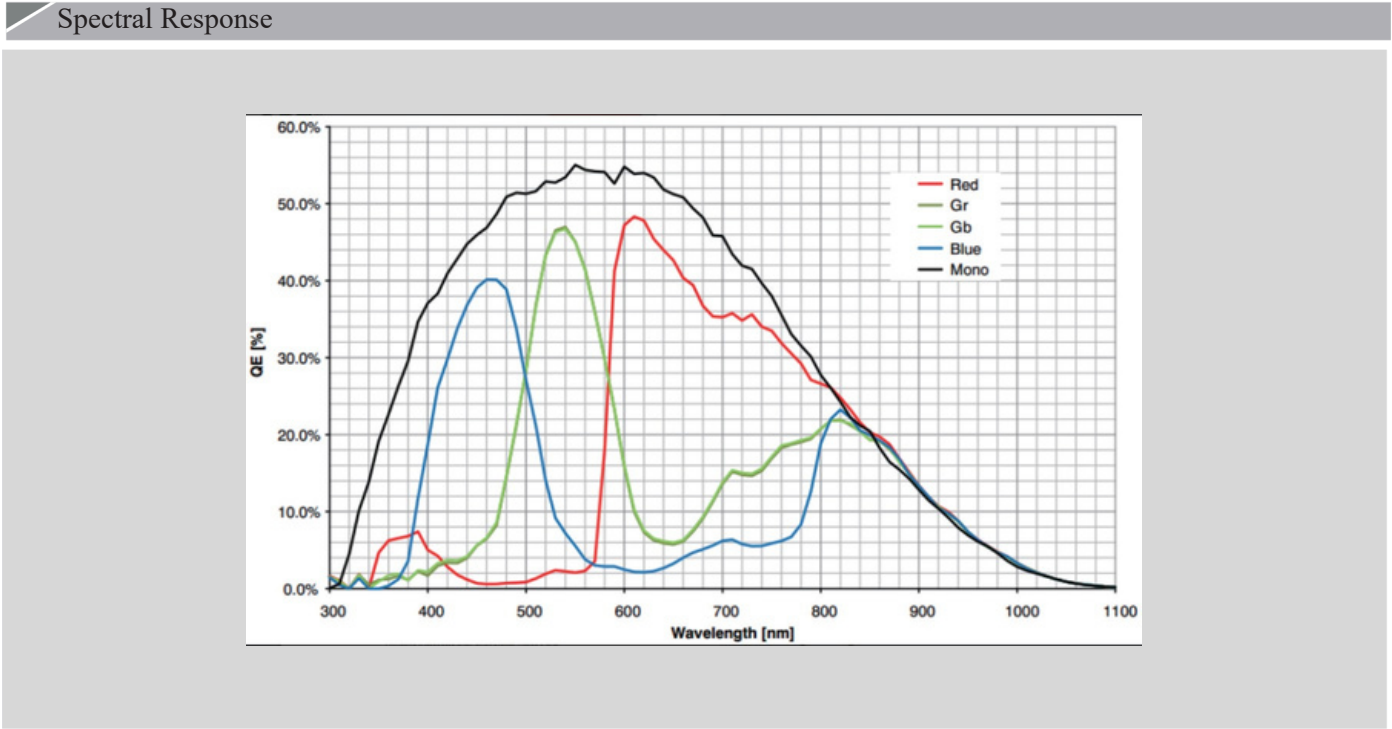

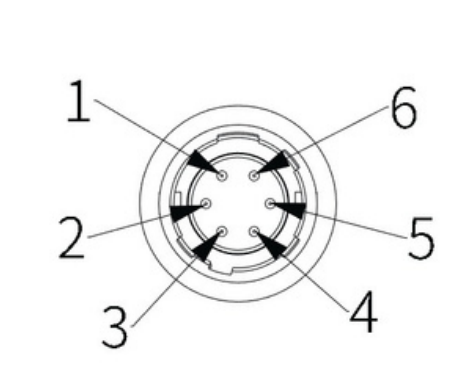I/O Interface Description		
	PIN	Signal
	1	Power
	2	Line1
	3	Line3
	4	Line2
	5	ISO_GND
		Description
		Power supply
		Opto-isolated input
		GPIO (I/O can be configured for non-isolated software)
		Opto-isolated output
		Opto-isolated signal ground
		Power ground and GPIO signal ground (GND)



Viscon Technology Co., Ltd.
54/88 Khlongsee, Khlong Luang District, Pathum Thani 12120 Thailand
Tel : 02-0009297
MB : 0809293068
E-mail : sale@viscontechonology.com



LINE

viscontechonology.com